



KRAFT&DELE

PROFESSIONAL


HEAVY DUTY SAWHORSE KD11874

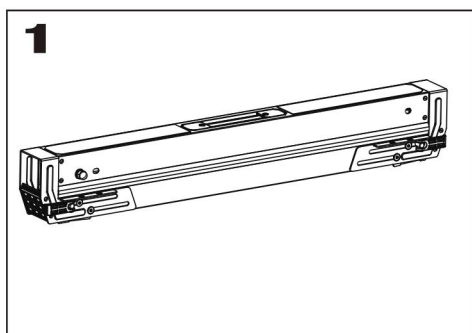


Sawhorse in folded/carry position.

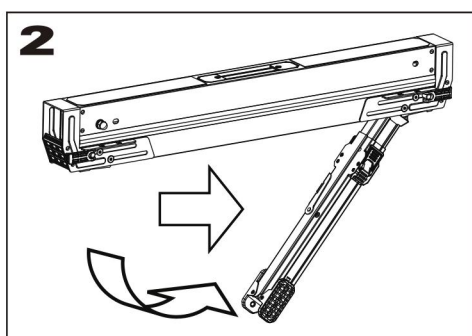


Above the indication "OPEN 1ST", press the release button and pull down the legs until they are fully extended.

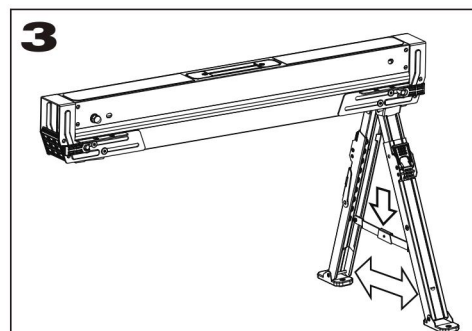


Separate the legs and push the crossbar downwards.

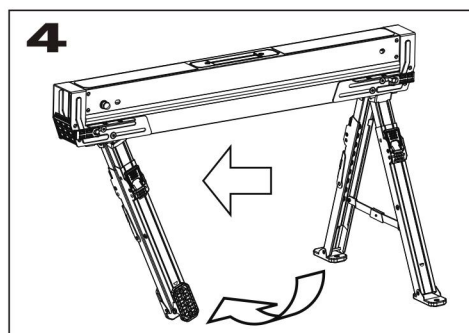


Above the indication "CLOSE 1ST", press the release button and fold down the legs until they are completely unfolded.

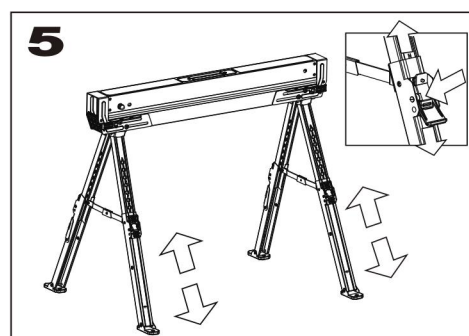


The legs can be adjusted in steps of 2.54 cm. To extend, pull down the legs until the latch is in the desired position. To retract, press the locking button, pull down slightly and subsequently push up the leg.

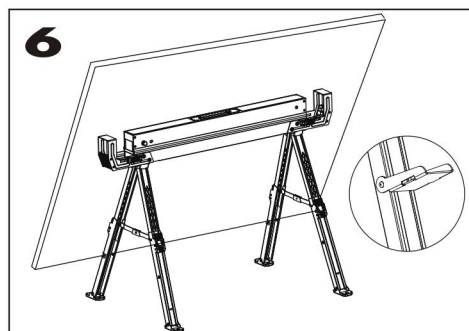

Unfold the support pins to support a plate for cutting.

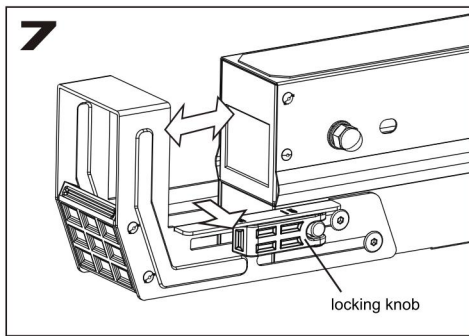

Open the locking knob and adjust the side bracket to the desired width, tighten the knob once the beam is in place. Adjustable between 0mm and 90mm for different beams.

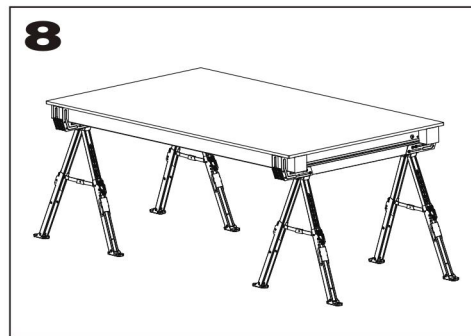

In combination with a second sawhorse, you can create a work table capable of bearing up to 1180 kg. You only need to insert beams between the side supports and connect the 2 sawhorses.

- To close the sawhorse, repeat these steps but in reverse order: first close leg "CLOSE 1ST" and then leg "OPEN 1ST".

SAFETY INFORMATION



FOR YOUR SAFETY, PLEASE ENSURE YOU READ THE SEINSTRUCTIONS CAREFULLY BEFORE USE AND KEEP THESE INSTRUCTIONS IN THE WORK SPACE WHERE THE SAWHORSE WILL BE USED AT ALL TIMES.

SAFE OPERATION AND USE OF THIS SAWHORSE

1. When lifting the sawhorse use proper lifting techniques to avoid personal injury.
2. Ensure the work area is well lighted while working.
3. Ensure the sawhorse is standing on a level surface that is clear, dry and free of debris.
4. Ensure all 4 legs have solid contact with the floor. If the sawhorse is not positioned level and straight, loads placed upon it could fall, potentially causing damage to the item(s) loaded on it, and possible severe personal injury or death.
5. Ensure the load placed on any sawhorse does not exceed the applicable Safe Working Load Rating. Overloading can lead to failure of the sawhorse, potentially causing damage to the item(s) loaded on it, and possible severe personal injury or death.
6. Never stack sawhorses to obtain extra height.

Caution:

Do not apply weight exceeding 590 kg of uniformly distributed load on sawhorse. Do not use as a step ladder or standing platform

Uniformly Distributed Load

The maximum uniformly distributed load across the top rail of the sawhorse, **PER EACH SAWHORSE**:

The maximum permissible weight of the sawhorse is indicated on the sawhorse and on the manual. "Uniformly Distributed Load" means when all the weight is distributed evenly on the top rail. The amount of weight that can be applied to 2 identical sawhorses is double this value. For example, a pallet or skid weighing not more than two times the Safe Working Load Rating can safely be carried by 2 of these sawhorses.

WARNING! To reduce the risk of personal injury, the user must read and understand the operator's manual.

Legs must be locked open. Do not stand on sawhorse. Do not overload.

MAXIMUM CAPACITY: 590 KG. USE ONLY ON A FLAT, DRY, HARD AND LEVEL SURFACE.



KRAFT&DELE PROFESSIONAL can never be held responsible for the incorrect use of this product. The **KRAFT&DELE** PROFESSIONAL sawhorse is protected by copyright. Copying the trestle and using the pictures, texts or logo without the express consent of **KRAFT&DELE** PROFESSIONAL may be prosecuted.